



BLACK CAT MINING TEETH & ADAPTERS

WEAR PARTS

for Large Loaders & Hydraulic Excavators



Mining Teeth

Tooth	RS	Penetration Plus	VT	Tiger	Twin Tiger	Flare	Loader
350	RV350RS - 14 lbs	RV350PP - 15 lbs	-	RV350T - 13 lbs	RV350TT - 17 lbs	RV350F - 17 lbs	-
400	RV400RS - 21 lbs	RV400PP - 22 lbs	-	RV400T - 19 lbs	RV400TT - 25 lbs	RV400F - 26 lbs	RV400LD - 40 lbs
450	RV450RS - 31 lbs	RV450PP - 32 lbs	-	RV450T - 28 lbs	RV450TT - 37 lbs	RV450F - 38 lbs	RV450LD - 58 lbs
550	RV550RS - 48 lbs	RV550PP - 50 lbs	-	RV550T - 44 lbs	RV550TT - 56 lbs	RV550F - 59 lbs	RV550LD - 84 lbs
600	RV600RS - 61 lbs	-	-	RV600T - 61 lbs	RV600TT - 78 lbs	-	RV600LD - 109 lbs
700	RV700RS - 82 lbs	-	-	-	-	-	RV700LD - 149 lbs
1000	RV1000RS - 114 lbs	-	-	-	-	-	RV1000LD - 207 lbs
1500	RV1500RS - 160 lbs	-	-	-	-	-	RV1500LD - 268 lbs
2500	RV2500RS - 200 lbs	-	RV2500VT - 207 lbs	-	-	-	-
3500	RV3500RS - 255 lbs	-	RV3500VT - 265 lbs	-	-	-	-


Adapters

Part Number	Description	Weight	A	B	C	D
RV350-150C30	Center	22 lbs	1.53"	30°	12.22"	3.88"
RV400-175C30	Center	34 lbs	1.78"	30°	14.00"	4.50"
RV450-200C22	Center	50 lbs	2.05"	22.5°	15.91"	5.05"
RV450-200(L/R)22	RH/LH	51 lbs	2.05"	22.5°	15.91"	5.05"
RV450-200C30	Center	49 lbs	2.05"	30°	15.91"	5.05"
RV550-250C30	Center	69 lbs	2.55"	22.5°	17.89"	5.68"
RV550-250C30	Center	67 lbs	2.55"	30°	17.89"	5.68"
RV600-275C22	Center	109 lbs	2.80"	22.5°	20.80"	6.38"
RV600-275(L/R)22	RH/LH	109 lbs	2.80"	22.5°	20.80"	6.38"
RV700-300C22	Center	161 lbs	3.05"	22.5°	23.50"	7.00"
RV700-300(L/R)22	RH/LH	159 lbs	3.05"	22.5°	23.50"	7.00"
RV1000-350C22	Center	211 lbs	3.55"	22.5°	25.90"	7.75"
RV1000-350C30	Center	204 lbs	3.55"	30°	25.90"	7.75"
RV1000-350E30	Split Leg	209 lbs	3.55"	30°	25.90"	7.75"
RV1500-400C22	Center	267 lbs	4.06"	22.5°	28.41"	8.50"
RV1500-400C30	Center	258 lbs	4.06"	30°	28.41"	8.50"
RV1500-400E30	Split Leg	268 lbs	4.06"	30°	28.41"	8.50"
RV2500-475C30	Center	326 lbs	4.84"	30°	30.60"	9.25"
RV2500-475E30	Split Leg	329 lbs	4.84"	30°	30.60"	9.25"
RV3500-550C30	Center	402 lbs	5.59"	30°	33.04"	12.58"
RV3500-550(L/R)30	RH/LH	858 lbs	-	30°	38.35"	-



REVOLUTION
BLACK CAT HAMMERLESS PATENTED TECHNOLOGY

- Fully Stabilized Nose & Pocket
- Hammerless Pin for Safe & Easy Installation
- More Details on Reverse

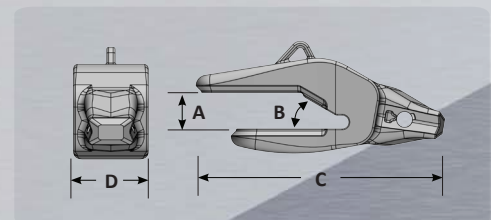

810.0916

MINING



www.BlackCatWearParts.com sales@blackcatwearparts.com Toll Free: 1.800.661.6666 Ph: 780.465.6666 Fax: 780.465.9595

Caterpillar® and other identities and/or trademarks referred to in this publication are the registered marks of the entities noted herein. The use of any trademarks of others than Black Cat Blades Ltd. are solely and exclusively for identification, informational, comparative, and descriptive purposes. Black Cat Blades Ltd. is not affiliated with any owner of such registered marks and does not make, use, or sell any products manufactured by any such entity identified in this publication.